


# 一体式保温球阀 BMS650Y41系列

Integrated Insulated Ball Valve



MasoneilanWilliamson

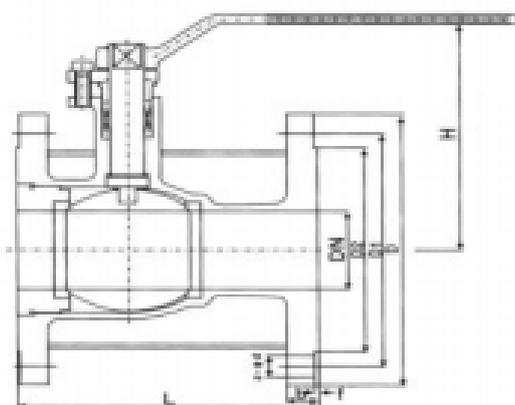

## PN1.6Mpa

公称通径 DN(mm)	长度	法兰外圆	法兰中心	水线外圆	法兰厚度	法兰眼	夹套接口 (丝口)
	L	D	D1	D2	B-F	Z-ΦD	
15	130	95	65	45	14-2	4-Φ14	3/8"
20	140	105	75	55	14-2	4-Φ14	3/8
25	150	115	85	65	14-2	4-Φ14	3/8
32	165	135	100	78	16-2	4-Φ18	1/2
40	180	145	110	85	16-3	4-Φ18	1/2
50	200	160	125	100	16-3	4-Φ18	1/2
65	220	180	145	120	18-3	4-Φ18	1/2
80	250	195	160	135	20-3	8-Φ18	1/2
100	280	215	180	155	20-3	8-Φ18	1/2
125	320	245	210	185	22-3	8-Φ18	3/4
150	360	280	240	210	24-3	8-Φ23	1
200	400	335	295	265	26-3	12-Φ23	1

## PN2.5Mpa

公称通径 DN(mm)	长度	法兰外圆	法兰中心	水线外圆	法兰厚度	法兰眼	夹套接口 (丝口)
	L	D	D1	D2	B-F	Z-ΦD	
15	130	95	65	45	14-2	4-Φ14	3/8"
20	140	105	75	55	14-2	4-Φ14	3/8
25	150	115	85	65	14-2	4-Φ14	3/8
32	165	135	100	78	16-2	4-Φ18	1/2
40	180	145	110	85	18-2	4-Φ18	1/2
50	200	160	125	100	20-3	4-Φ18	1/2
65	220	180	145	120	22-3	8-Φ18	1/2
80	250	195	160	135	22-3	8-Φ18	1/2
100	280	230	190	160	24-3	8-Φ23	1/2
125	320	270	220	188	28-3	8-Φ25	1.3/4
150	360	300	250	218	30-3	8-Φ25	1
200	400	360	310	278	34-3	12-Φ25	1